


PRODUCT DESCRIPTION

The classical spherical-headed, forged foot anchors are the first choice for most applications. They are manufactured from hot-dipped galvanised, forged, high impact strength construction steel. Genuine Unilift anchors are stamped with a 'U' on the head, as well as load class and strength.

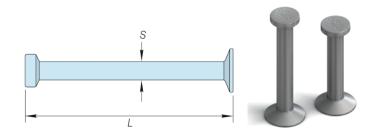

APPLICATION

• All precast lifting application

PART CODES, DIMENSIONS AND PACK SIZE

Load Class (Tonnes)	Dimensions (mm)		LK Locking	Part	Quantity per
	L	S	Klaw	Code	bag
	35	10	01LK	CA01035	200
	45	10	01LK	CA01045	200
	55	10	01LK	CA01055	200
1.3	65	10	01LK	CA01065	200
	85	10	01LK	CA01085	100
	120	10	01LK	CA01120*	100
	240	10	01LK	CA01240	50
2.5	55	14	02LK	CA02055	100
	75	14	02LK	CA02075	100
	85	14	02LK	CA2085*	50
	120	14	02LK	CA02120*	50
	170	14	02LK	CA02170*	25
	280	14	02LK	CA02280	25
5.0	75	20	05LK	CA05075	50
	95	20	05LK	CA05095	50
	120	20	05LK	CA05120*	25
	150	20	05LK	CA05150	25
	170	20	05LK	CA05170*	25
	240	20	05LK	CA05240*	20
	340	20	05LK	CA05340	10
	960	20	05LK	CA05960	1
10.0	150	28	10LK	CA10150*	10
	200	28	10LK	CA10200*	10
	340	28	10LK	CA10340*	5
20.0	200	39	20LK	CA20200	1
	340	39	20LK	CA20340	1
	500	39	20LK	CA20500	1
32.0	500	50	32LC	CA32500	1
	700	50	32LC	CA32700	1

^{*} Type 316 stainless steel anchors in stock, other sizes on request.