


Deck Rail Chairs

PRODUCT DESCRIPTION

Danterr's Deck Rail Chairs are engineered plastic deck rail spacers developed for reliable reinforcement support in slab-on-ground and formwork installations. With a 750mm continuous bar chair profile, each unit features legs spaced at 75mm intervals and designed with pointed feet to minimise surface contact. The integrated joinable bar chair system uses secure clip-locks for consistent bar alignment and uninterrupted reinforcement support.

These formwork spacers are purpose-built for commercial and civil applications, offering height options from 25mm to 100mm (in 5mm increments) and full compliance with AS/NZS 2425:2015. Optional bases provide stability on soft or uneven ground.

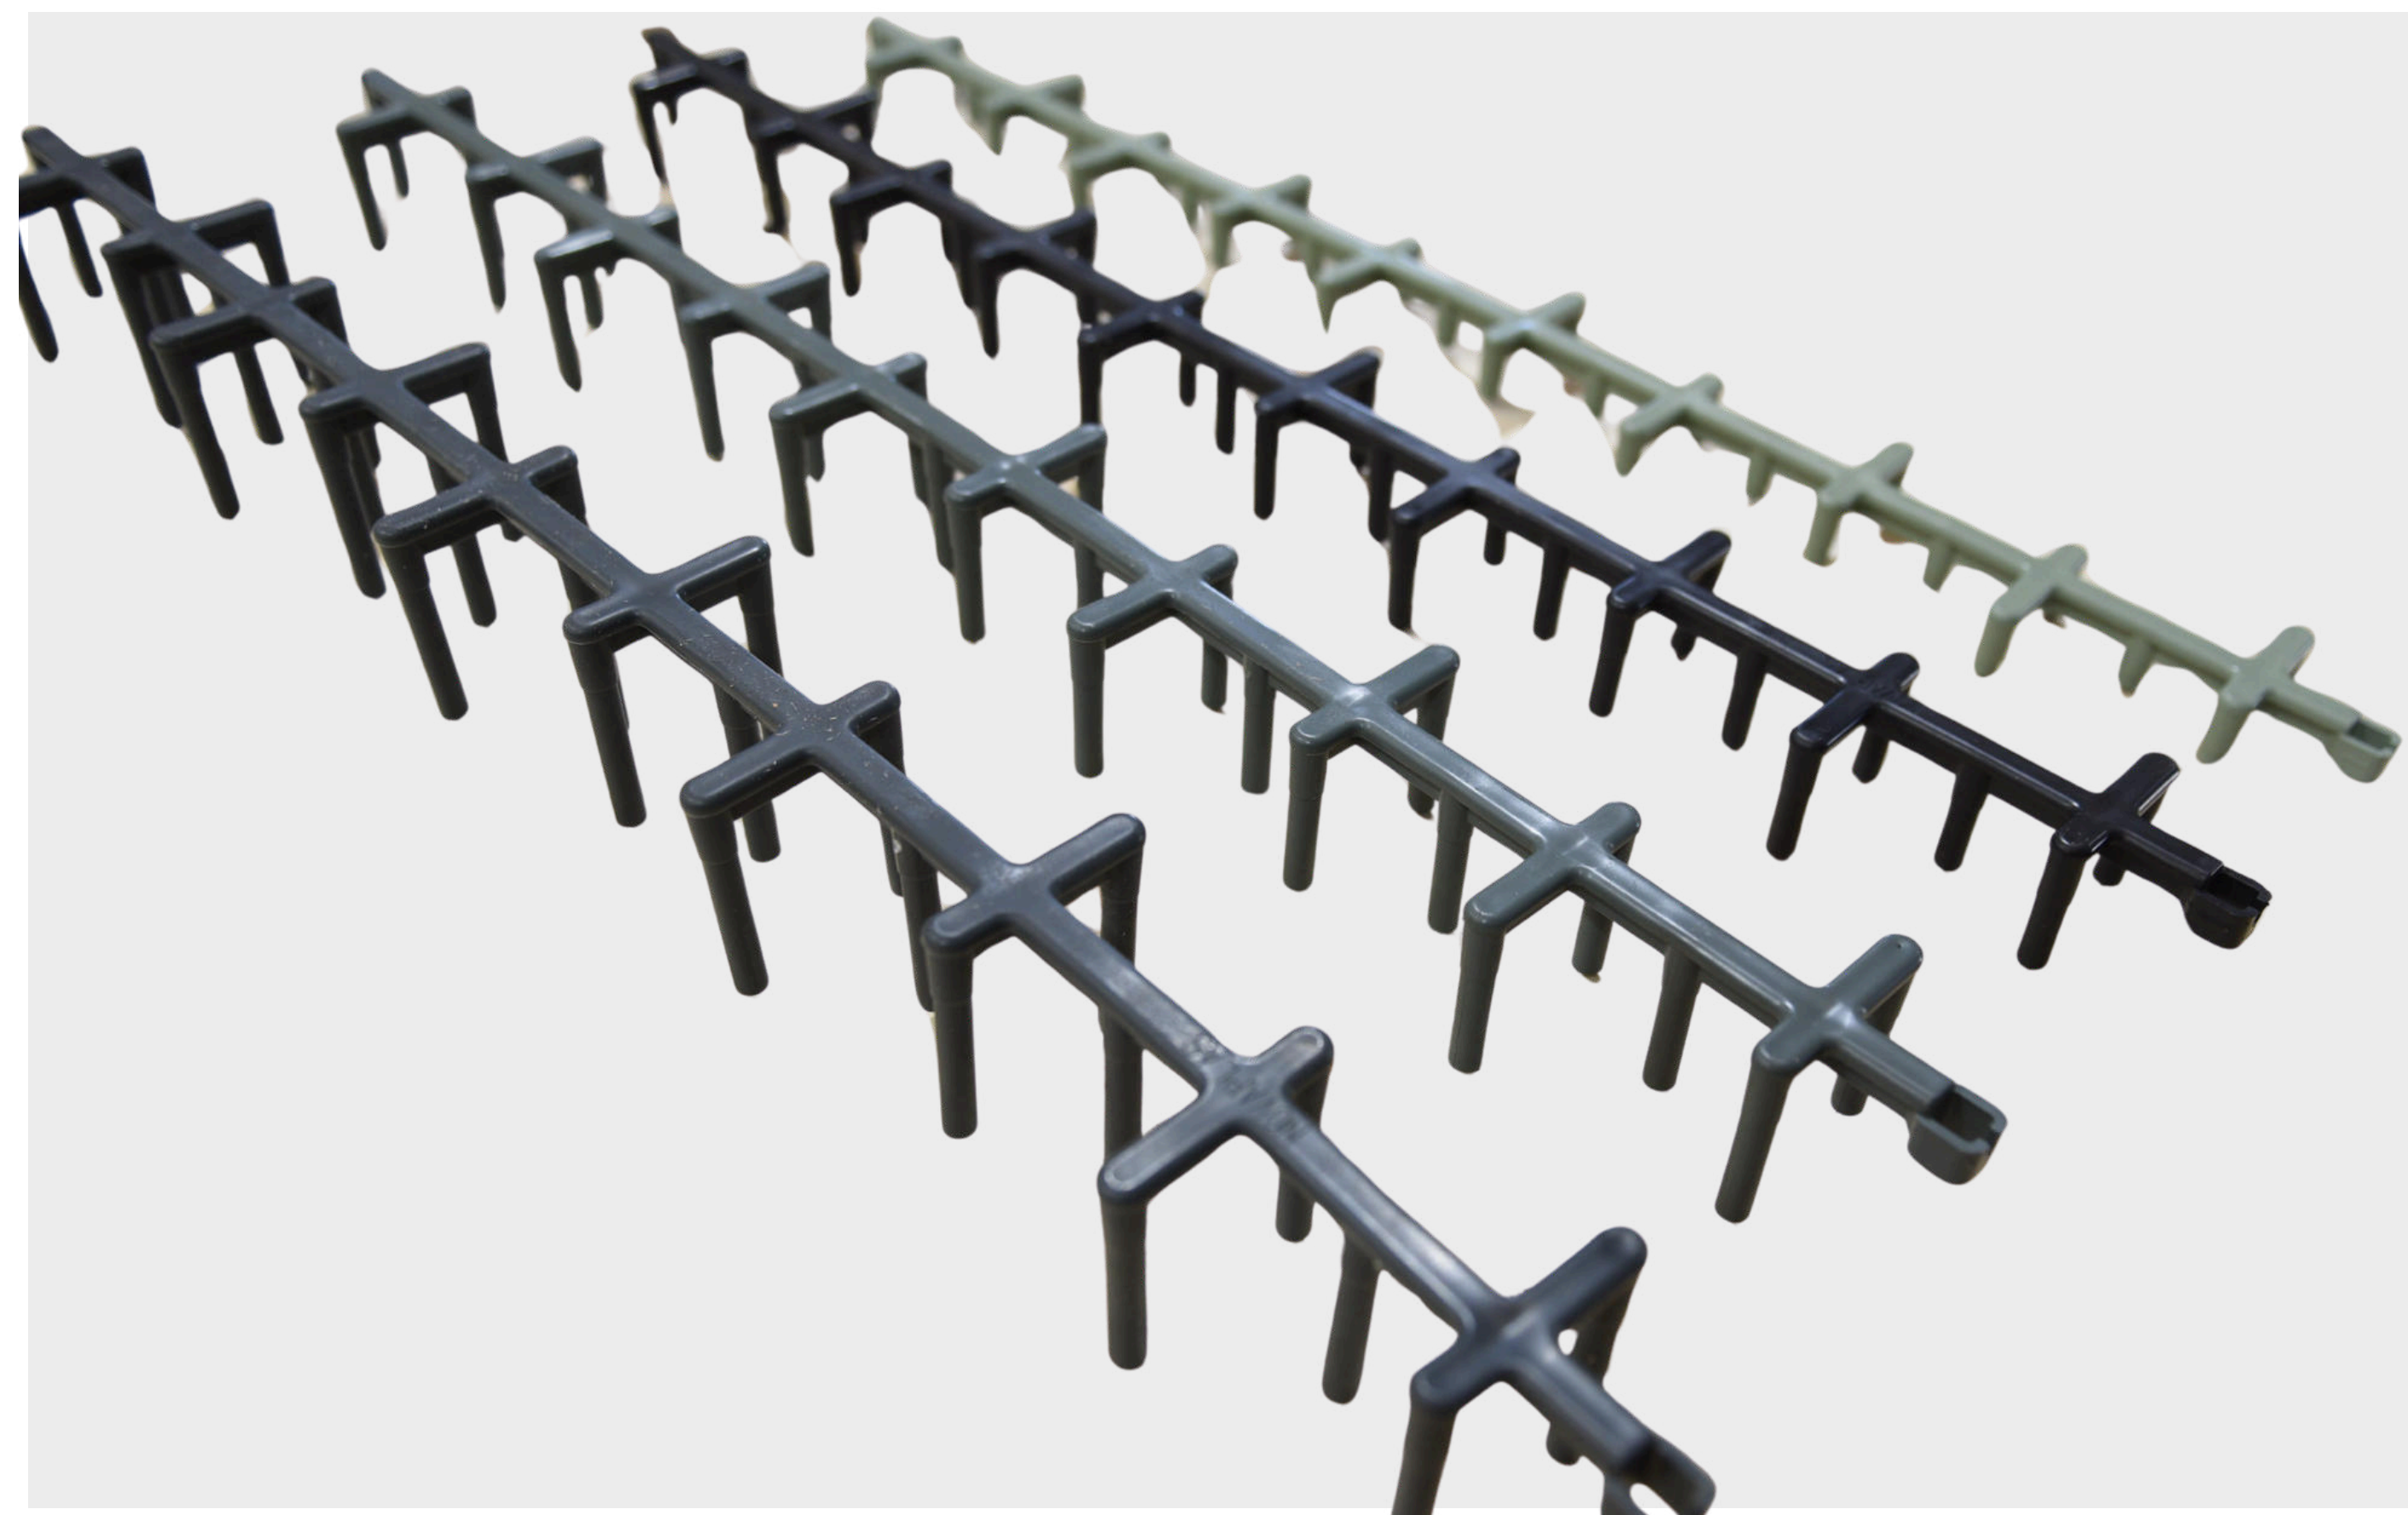

FEATURES & BENEFITS

- 750mm continuous bar chair format
- Clip-fit ends create a reliable, interlocking system
- Pointed legs reduce surface contact
- Free concrete flow through 75mm leg spacing
- UV-resistant and recyclable construction
- Supports height from 25mm to 100mm in 5mm steps
- Fully compliant with AS/NZS 2425:2015

APPLICATIONS

- Slab reinforcement chair for mesh and bar
- Formwork spacer for slab-on-ground concreting
- Precast or suspended slab positioning
- Use with deck rail base for softer ground support
- Factory steel mesh support systems

PACKAGING & AVAILABILITY

Product Code	Description	Bag Qty	Pallet Qty
101465	Bar Chair Deck Rail 25mm x 750mm	25	2000
111192	Bar Chair Deck Rail 30mm x 750mm	25	2000
105094	Bar Chair Deck Rail 35mm x 750mm	25	1500
105848	Bar Chair Deck Rail 40mm x 750mm	25	1500
101466	Bar Chair Deck Rail 45mm x 750mm	25	1500
101467	Bar Chair Deck Rail 50mm x 750mm	25	1000
111478	Bar Chair Deck Rail 55mm x 750mm	25	1000
107382	Bar Chair Deck Rail 60mm x 750mm	25	1000
101468	Bar Chair Deck Rail 65mm x 750mm	25	1000
109708	Bar Chair Deck Rail 70mm x 750mm	25	1000
101469	Bar Chair Deck Rail 75mm x 750mm	25	1000
109709	Bar Chair Deck Rail 90mm x 750mm	25	550
105038	Bar Chair Deck Rail 100mm x 750mm	25	500
101470	Deck Rail Base 740mm x 90mm	50	1500

TECHNICAL SPECIFICATIONS

PHYSICAL PROPERTIES

Property	Specification
Material	Injection-moulded PP/PE (recycled)
Length	750mm
Cover Range	25mm-100mm (5mm increments)
Leg Spacing	~75mm
UV Resistance	Yes
Recyclable	100%

SAFETY

- Non-hazardous and stable under use
- Use PPE (gloves, eyewear) when handling on-site
- Prevent trip hazards by securing loose rails
- Follow site-specific disposal or recycling protocols

INSTALLATION INSTRUCTIONS

- Connect lengths on site with integrated clips
- Position vertically with legs facing downward
- Base plates are optional for enhanced load support
- Space appropriately according to rebar layout
- Inspect for full seating before pouring concrete